


Sanding disc with foam material, self-fastening, waterproof

FD 500

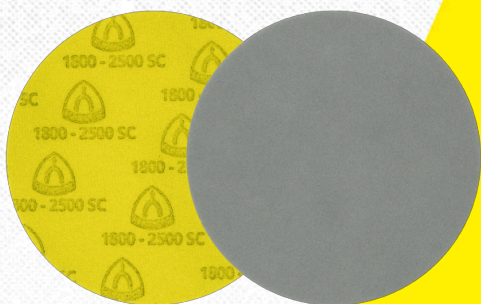

Properties

Bonding agent	Resin
Grain	Aluminium oxide/SiC
Backing	Foam material/velours

Product benefit

Uniform pressure distribution thanks to elastic foam coating - Soft grinding and extremely fine scratch pattern - Superior flexibility and adaptability on contours and profiles - Exceptionally well suited for finish grinding - Suitable for wet and dry use - Available in grit 1000, 1500 (Aluminium oxide) and 2000, 3000 (SiC)

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

Diameter in mm	grain	Hole pattern	type of coat.abras.	Packing unit/pcs.	Cat. number
125	1000	○ 0	FD 500	10	342291
125	1500	○ 0	FD 500	10	342290
125	2000	○ 0	FD 500	10	342289
125	3000	○ 0	FD 500	10	342288
150	1000	○ 0	FD 500	10	342294
150	1500	○ 0	FD 500	10	342293

Klingspor Schleifsysteme GmbH und Co. KG

Hüttenstraße 36 - 35708 Haiger - Germany
 Fon + 49 (0) 2773 922-0 Fax + 49 (0) 2773 922-186
 sales@klingspor.de - www.klingspor.de



Materials

Paint/Varnish/Filler ●

Applications

- ▶ Automotive industry
- ▶ Boat and shipbuilding
- ▶ Wind energy industry
- ▶ Paint shops
- ▶ Wood processing industry

Diameter in mm	grain	Hole pattern	type of coat.abras.	Packing unit/pcs.	Cat. number
150	2000	○ 0	FD 500	10	342295
150	3000	○ 0	FD 500	10	342292

Klingspor Schleifsysteme GmbH und Co. KG

Hüttenstraße 36 - 35708 Haiger - Germany

Fon + 49 (0) 2773 922-0 Fax + 49 (0) 2773 922-186

sales@klingspor.de - www.klingspor.de

