


Abrasive paper, self-fastening

PS 33 CK

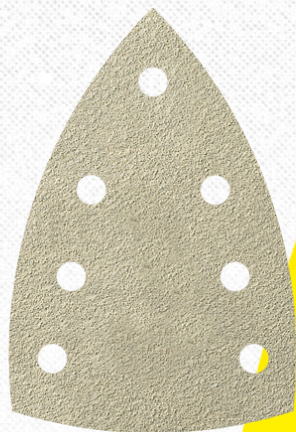

Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	C-paper

Product benefit

Improved abrasive and stock removal performance thanks to special heat-tempered aluminium oxide abrasive grain - Reduced clogging thanks to sanding active fillers in the size coat and the semi-open coating - Outstanding flexibility paired with good stability and tear resistance thanks to latex impregnated paper backing

Materials

Paint/Varnish/Filler	●
Wood	●
Plastic	●

Applications

- ▶ Automotive industry
- ▶ Wind energy industry
- ▶ Aircraft construction
- ▶ Wood processing industry
- ▶ Craftsman companies

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

Width x Length in mm	grain	Hole pattern	type of coat.abras.	Packing unit/pcs.	Cat. number
98 x 148	40	🔍 GLS 24	PS 33 CK	100	215472
98 x 148	60	🔍 GLS 24	PS 33 CK	100	215473
98 x 148	80	🔍 GLS 24	PS 33 CK	100	215474
98 x 148	100	🔍 GLS 24	PS 33 CK	100	215475
98 x 148	120	🔍 GLS 24	PS 33 CK	100	215476

Klingspor Schleifsysteme GmbH und Co. KG

Hüttenstraße 36 - 35708 Haiger - Germany
 Fon + 49 (0) 2773 922-0 Fax + 49 (0) 2773 922-186
 sales@klingspor.de - www.klingspor.de

