


Small cutting-off wheel **A 660 R SUPRA**

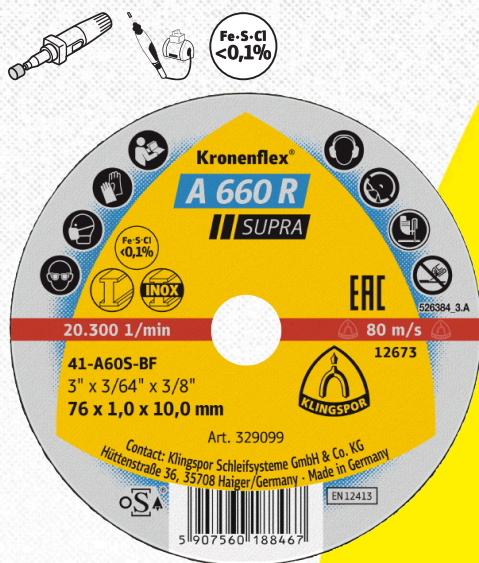

Properties

Bonding agent	Synthetic resin, fibre-reinforced
Type of grain	Aluminium oxide
Bond	■■■■■□□
Aggression	■■■■■□□
Service life	■■■■■□□

Product benefit

Minimal burr formation - For universal use in hard-to-reach areas -
For cutting tins, profiles and solid materials

Materials

Steel	●
Stainless steel	●

Applications

- ▶ Plant engineering
- ▶ Apparatus and container manufacturing
- ▶ Metal construction
- ▶ Locksmith's shop
- ▶ Stainless steel processing industry
- ▶ Railing construction

Diameter x Width x Bore in mm	Form	Vmax m/s	Max. RPM	Packing unit/pcs.	Cat. number
100 x 1 x 10	—	80 m/s	15300 rpm	25	368876
50 x 1 x 6	—	80 m/s	30600 rpm	40	368881
76 x 1 x 10	—	80 m/s	20100 rpm	40	368879
76 x 1 x 6	—	80 m/s	20100 rpm	40	368880
76 x 1,6 x 10	—	80 m/s	20100 rpm	40	368877
76 x 1,6 x 6	—	80 m/s	20100 rpm	40	368878

Klingspor Schleifsysteme GmbH und Co. KG

Hüttenstraße 36 - 35708 Haiger - Germany
Fon + 49 (0) 2773 922-0 Fax + 49 (0) 2773 922-186
sales@klingspor.de - www.klingspor.de

