


SCM disc, waterproof

NDS 800

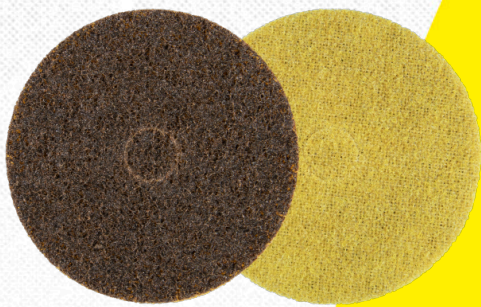

Properties

Bonding agent	Resin
Grain	Aluminium oxide

Product benefit

High edge stability - Aggressive abrasive behaviour - Long service life
 - Can be used for wet and dry grinding - With expressible center hole for easy mounting, secure hold and smooth running on backing plates with centering - Also suited for backing pads without centering and fiber discs backing plates with clamping screw

Materials

Metals	●
Stainless steel	●
Paint/Varnish/Filler	○
Plastic	○
Wood	○

Applications

- ▶ Stainless steel processing industry
- ▶ Metal construction
- ▶ Apparatus and container manufacturing

Available grits:

16 20 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 2000 3000 4000 5000 6000

Diameter x Bore in mm	Grit	Colour	Grade	Packing unit/pcs.	Cat. number
115 x 22	50	brown	coarse	10	320103
115 x 22	100	maroon	medium	10	320104
115 x 22	180	blue	very fine	10	320105
125 x 22	50	brown	coarse	10	320106

Klingspor Schleifsysteme GmbH und Co. KG

Hüttenstraße 36 - 35708 Haiger - Germany
 Fon + 49 (0) 2773 922-0 Fax + 49 (0) 2773 922-186
 sales@klingspor.de - www.klingspor.de



Diameter x Bore in mm	Grit	Colour	Grade	Packing unit/pcs.	Cat. number
125 x 22	100	maroon	medium	10	320107
125 x 22	180	blue	very fine	10	320108

Klingspor Schleifsysteme GmbH und Co. KG

Hüttenstraße 36 - 35708 Haiger - Germany

Fon + 49 (0) 2773 922-0 Fax + 49 (0) 2773 922-186

sales@klingspor.de - www.klingspor.de

